






Mi empty boxes



Mi 0200

- built-in dimensions W 275 x H 275 x T 150 mm

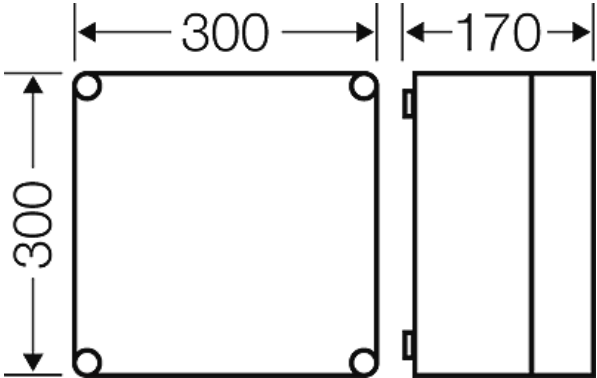





- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation
- Material: PC (polycarbonate)
- protection class: II
- colour: grey, RAL 7032

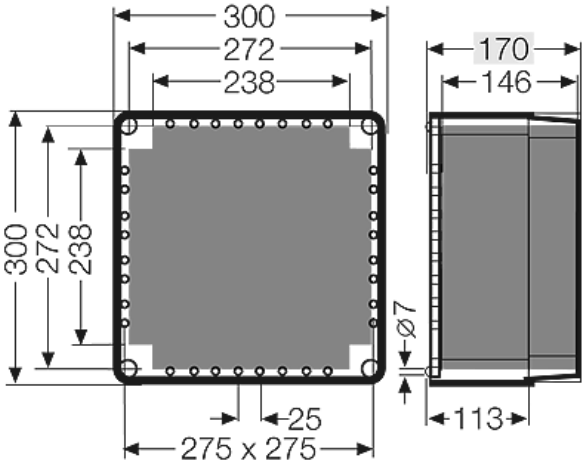
mounting height	275 mm
mounting width	275 mm
width	300 mm
height:	300 mm
depth	170 mm
Weight	1,919 kg

Drawings


Dimension drawing



Detail mass







Mi empty boxes



Mi 0200

- built-in dimensions W 275 x H 275 x T 150 mm

box walls




2 x M 20
10 x M 25
1 x M 32/40

4 x M 25
3 x M 40/50

Operating and ambient conditions





Application area	Mi boxes are suitable for outdoor installation (harsh environment and/or outdoor). The material is examined and therefore qualified for the outdoor installation during direct sun radiation. However, pay attention to the climatic effects on the equipment.
Resistant to occasional cleaning procedures (direct jet)	Resistance to occasional cleaning procedures (direct jet) with high-pressure cleaner without cleaning additives, water pressure: max 100 bar, water temperature: Max. 80° C, distance => 0.15 m, in accordance with IP 69K requirements, single enclosure without lid equipment (no enclosure assembly), enclosure and cable glands at least IP 65.
Ambient temperature	Maximum value + 70° C Minimum value - 25° C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60 695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Fire protection in the event of specific risks or hazards	Demands placed on electrical installations and devices in areas and facilities subject to fire risk, e.g. DIN VDE 0100 Part 482, official regulations, VdS directives Minimum requirements - Glow wire test to IEC 60 695-2-11: - 850°C for boxes and cable glands - 850°C for cavity wall installation - Use of fire resistant cables
Burning behaviour	Glow wire test IEC 60 695-2-11: 960° C UL Subject 94: V-2 flame resistant self-extinguishing
Degree of protection against mechanical load	IK08 (5 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 754-2
Note:	Supplementing references regarding outdoor installation - harsh environment and / or outdoor: - The materials used for the Mi System are basically UV resistant, so that the mechanical resistance of the boxes is maintained during UV effect. Depending on the intensity of the UV effect e.g. transparent lids can become intransparent. - The top side of the boxes should be protected by a

Mi empty boxes



Mi 0200

- built-in dimensions W 275 x H 275 x T 150 mm

cover against weather influences such as rains, ice and snow. - Further on, also chemical influences have to be considered with the selection of the installation place - apart from the IP rating and climatic effects. - In order to keep the maximum permissible ambient temperature of the installed equipment as well as for the prevention from condensation additional measures as ventilation and/or heating may be necessary. To material properties see technical data.