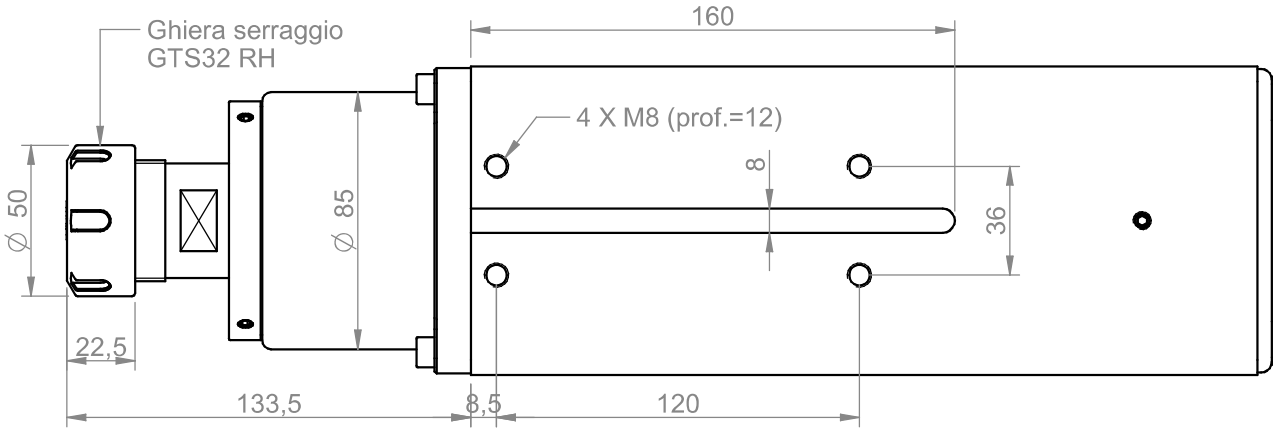

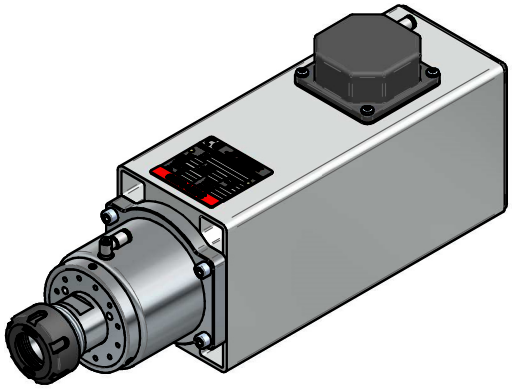

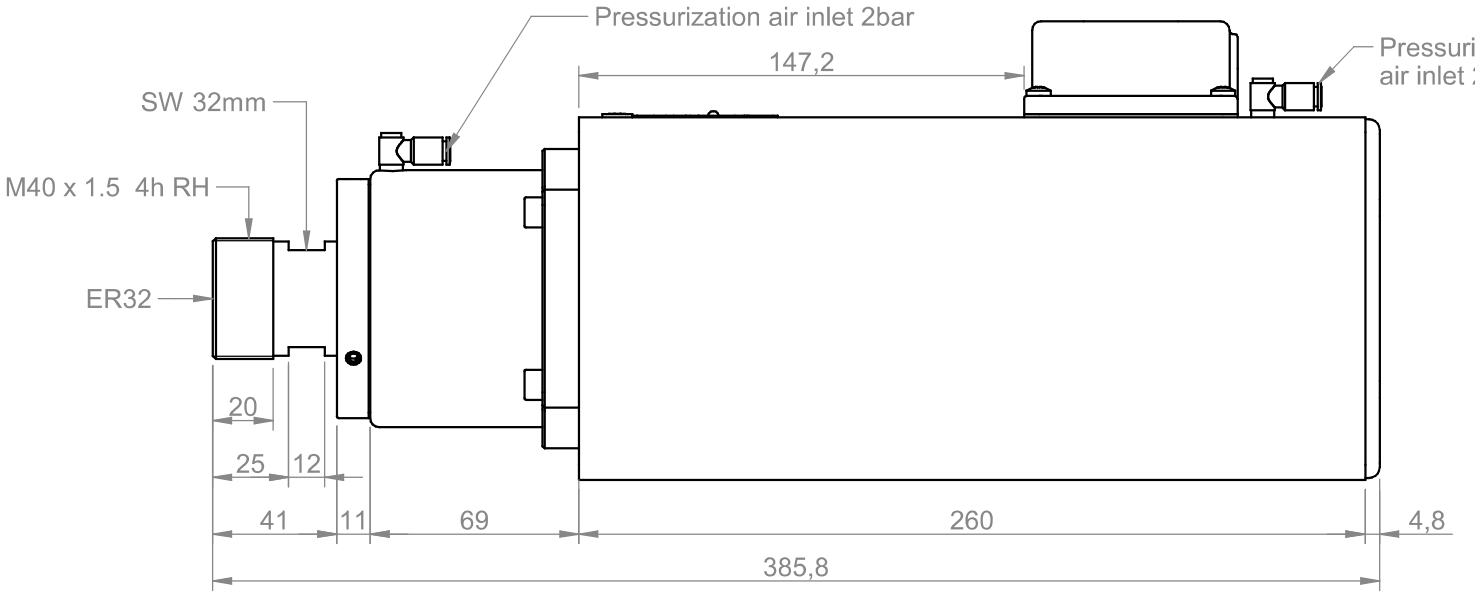

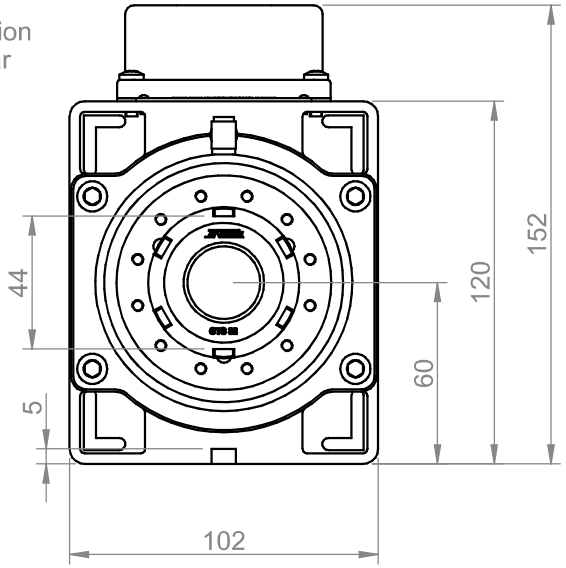

USE DRIED AIR:
ACCORDIND TO DIRECTIVE ISO 8573-1
CLEANLINESS CLASS 2/4/3
SOLID PARTICLES: 1 mincron/1PPM
HUMIDITY: DEW POINT 3°C
OIL: 1mg/m^3
USE 5 micron FILTER +
0,1 micron min OIL SEPARATOR.

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Base voltage Y [V]	Protection	Ins. Cl.
5.6	S1	18000	300	220	380	IP64	F

Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Absorb. Δ [A]	Absorb. Y [A]	Part number on nameplate
6000	24000	400	20.0	11.5	COM51600376

Balancing according to ISO 1940 - G2.5 @ 24000 rpm	Balancing type	tool type	full key	tool type	half key	Peso / weight
						14.84 kg

Tolleranze non quotate / unlisted tollerances: ±0.5mm
Smussi non quotati / unlisted chamfers: ±0.5mm

▽▽▽ = 0.8	▽▽ = 3.2	▽ = 12.5	~ =

rev. n°	description	date	signature
00	Emissione	01/02/2016	D. Bottarel

drawn - date	approved - date	checked - date	sostituisce il	foglio / sheet	scala	A4
D. Bottarel - 01/02/2016	S. Perli - 01/02/2016	S. Perli - 01/02/2016	sostituito dal	1 / 1	n.d.	

TEKNOMOTOR

Teknomotor S.r.l.
Via Argenega 31, I-32038 Quero Vas (BL)
www.teknomotor.com

Title: 5160-D-2DB-P-ER32-PR-HY-SS-RH

Customer: Catalogo

Drawing code: COM51600376

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.