


A

A

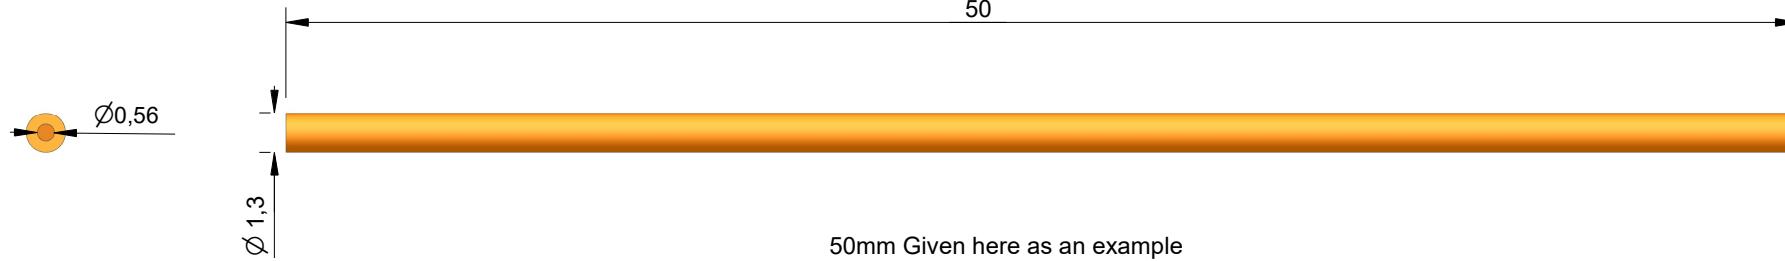

B

B

Insulation colour:	Orange
Insulation material:	PVC
Cross-section:	0.25mm ²
Cross-section:	24 AWG
C	Core: Untinned copper wire class 5(Flexible)
Temperature range:	-30 to 70 °C
Cable design:	Based on VDE 0812
Flame-resistant according to	IEC 60332-1-2
Conductor structure:	IEC 60228 class 5 (fine)
Minimum bending radius:	4x outer diameter
Nominal voltage:	U0/U: 24/50 V
D	Test voltage: 2500 V
CAUTION:	NOT FOR mains voltage!
Units and Tolerances:	mm / +/-0.1mm

SCALE 1:1



Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Drawn by Kevin Damen		Checked by	Approved by - date	File name	Date 25-2-2025	Scale 4:1
371				www.damencnc.com		
371 Single Conductor Wire Orange 0,25mm ² , LiY,70°C				Edition	Sheet	1 OF 1