


# triflex® R | Series TRCF | Delivery program

Closed design, dirt-resistant, quick filling



TRCF

▶ 596





...TRCF  
Closed design with snap lock mechanism

## triflex® R | Series TRCF | Closed design with snap lock mechanism

Series TRCF - closed with snap lock mechanism	Bi 1 [mm]	Ba [mm]	R [mm]	d1 [mm]	Pitch [mm]	Links/m	Weight [kg/m]
TRCF. 85. 135.0**	30	94,5	135	28	30,6	33	≈ 2,1
TRCF. 100.145.0	34,3	108	145	32,3	34,5	29	≈ 2,7

\*\*Width available upon request, please consult igus® for delivery time! More widths available upon request, please consult igus® for delivery time.

### Dimensions

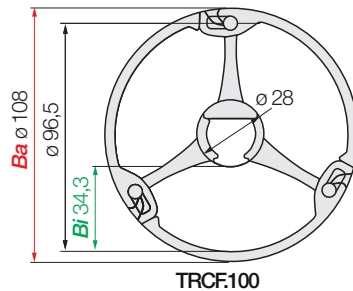

Snap lock mechanism for quick filling.  
Video online ▶ [www.igus.eu/TRLFlip](http://www.igus.eu/TRLFlip)

### All triflex® R accessories like:

- Swivel bearings for smooth motion
  - Protectors
  - Gliding feed-throughs
  - Strain relief systems: Quick exchange kit, Pivot bracket, triflex® R connection
  - TRE.LOCK clips
  - Back pull systems: RS triflex® R-Set the universal module and RSP the intelligent retraction system
  - Fiber rod module & Installation kit
  - Protective jackets.
- More information ▶ from page 596

