


# DCNC-NEMA23-2.5-NM

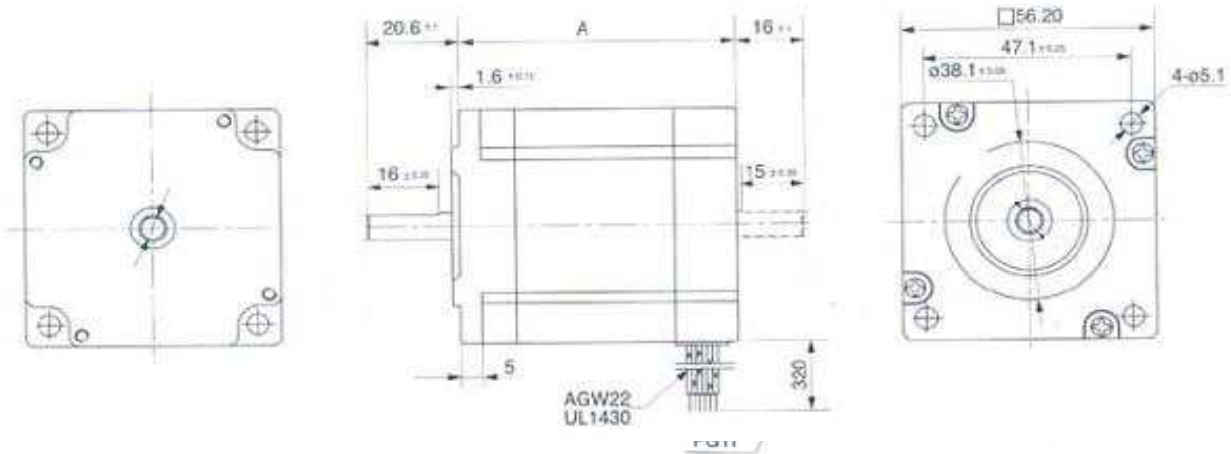

Specification		
<b>Flange Type</b>		Nema 23
<b>Holding Torque</b>	Nm	2.5(P,S) 1,8(UNI)
<b>Rated Current</b>	Amp / Phase	3A unipolar, 2,1A series, 4,2A parallel
<b>Resistance</b>	Ohm / Phase	0.7(P),2.8(s),1.4(UNI)
<b>Inductance</b>	mH / Phase	2.5(P),10(S),2.5(UNI)
<b>Rotor Inertia</b>	(g.cm <sup>2</sup> )	680,0
<b>Weight</b>	grams	1300,0
<b>Length A</b>	mm	100,0
<b># Wires</b>		4,0
<b>Shaft Diameter + Length</b>		8.00mm 19mm

Driver		Current Setting
<b>2Amp Driver</b>	vref	0,9V (S)
<b>3D step driver</b>	vref	0,9V (S)
<b>4D step driver</b>	vref	0,9V (S)
<b>4Amp Driver</b>	vref	0,3V(S) 0,9V(P)
<b>HP5056</b>	dip switches	2,1A Peak(S), 4,3A Peak(P)
<b>Hp8078</b>	dip switches	NotPossible(S), 4,2A Peak(P)

Parallel		Series	
<b>1A</b>	Blue	<b>1A</b>	NVT
<b>1B</b>	Red	<b>1B</b>	NVT
<b>2A</b>	Black	<b>2A</b>	NVT
<b>2B</b>	Green	<b>2B</b>	NVT
			0
			0

<b>Date</b>	13-5-2014
<b>Author</b>	Kevin Damen <a href="http://www.damencnc.com">www.damencnc.com</a>