


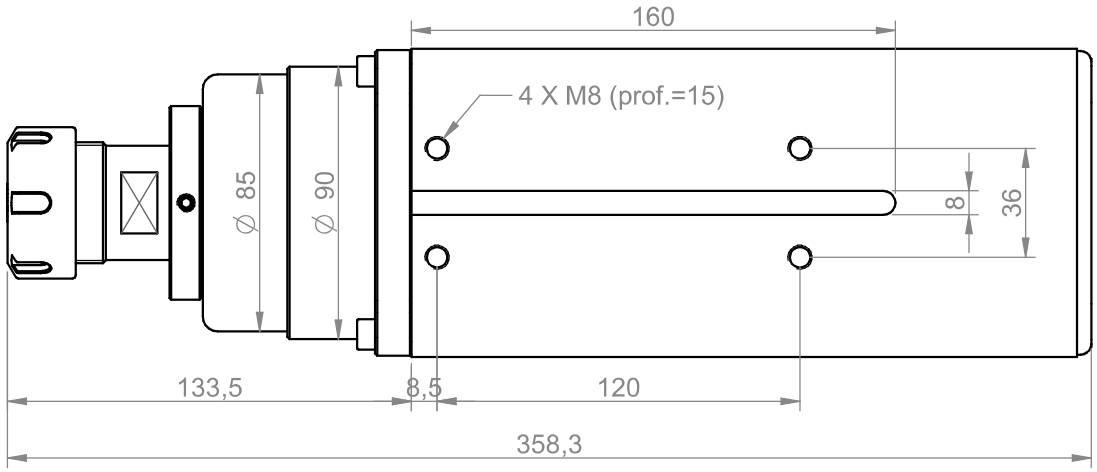


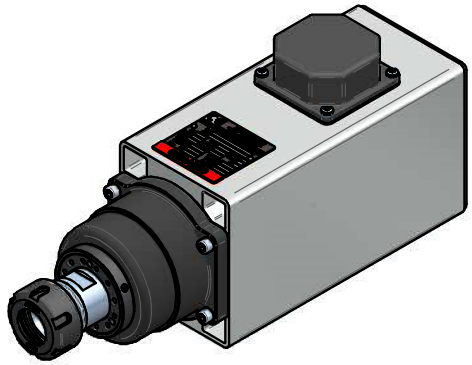

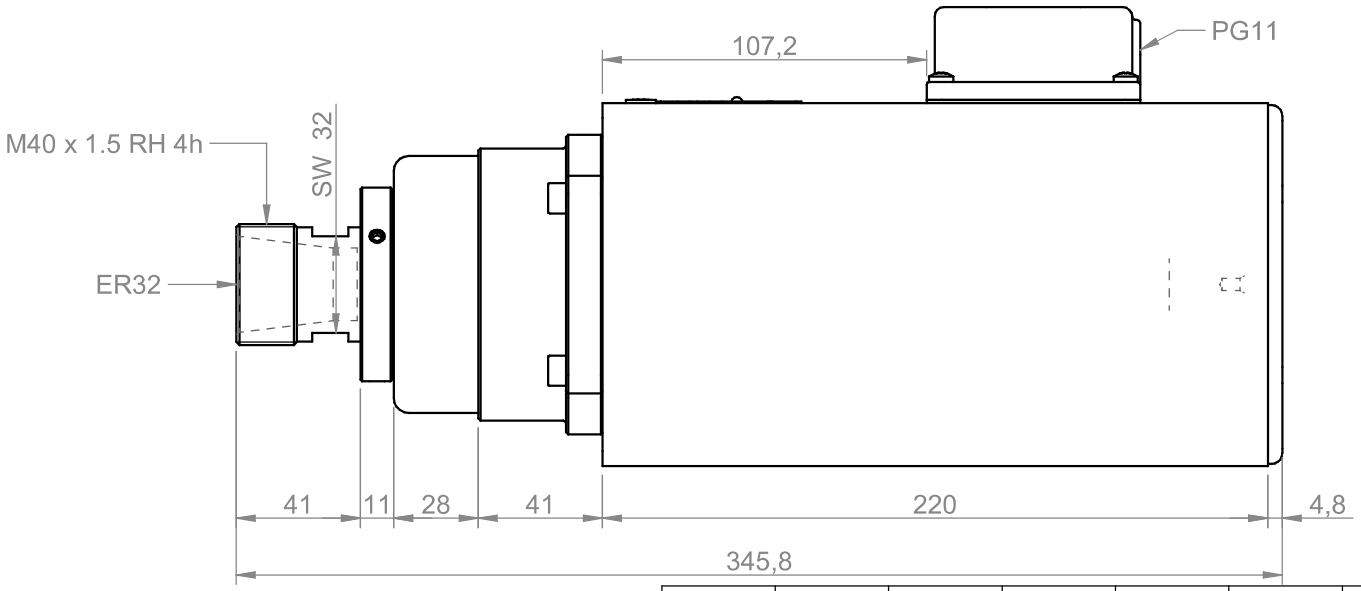

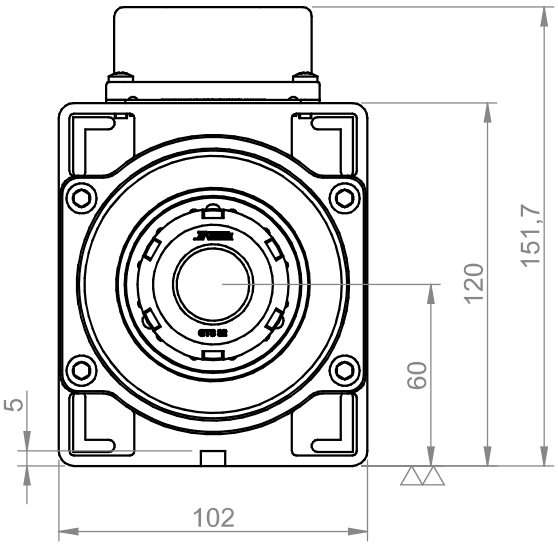

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Base voltage Y [V]	Protection	Ins. Cl.
3.3	S1	18000	300	220	380	IP54	F

Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Absorb. Δ [A]	Absorb. Y [A]	Part number on nameplate
6000	24000	400	13.7	7.9	COM51600453

Balancing according to ISO 1940 - G2.5 @ 24000 rpm	Balancing type	tool type full key	tool type half key	Peso / weight
				12.65 kg

Tolleranze non quotate: UNI EN 22768 fH
Smussi non quotati: 0.5mm

▽▽ = 0.8 ▽ | ▽▽ = 3.2 ▽ | ▽ = 12.5 ▽ | ~ = ▽

rev. n°	description	date	signature
00	Emissione	12/04/2019	D. Bottarel

drawn - date	approved - date	checked - date	sostituisce il	foglio / sheet	scala	A4
D. Bottarel - 12/04/2019	S. Perli - 12/04/2019	S. Perli - 12/04/2019	sostituito dal	1 / 1	n.d.	

Teknomotor S.r.l.
Via Argenega 31, I-32038 Quero Vas (BL)
www.teknomotor.com

Title: 5160-A-2DB-P-ER32-HY-RH

Customer: Catalogo

Drawing code: COM51600453

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.