
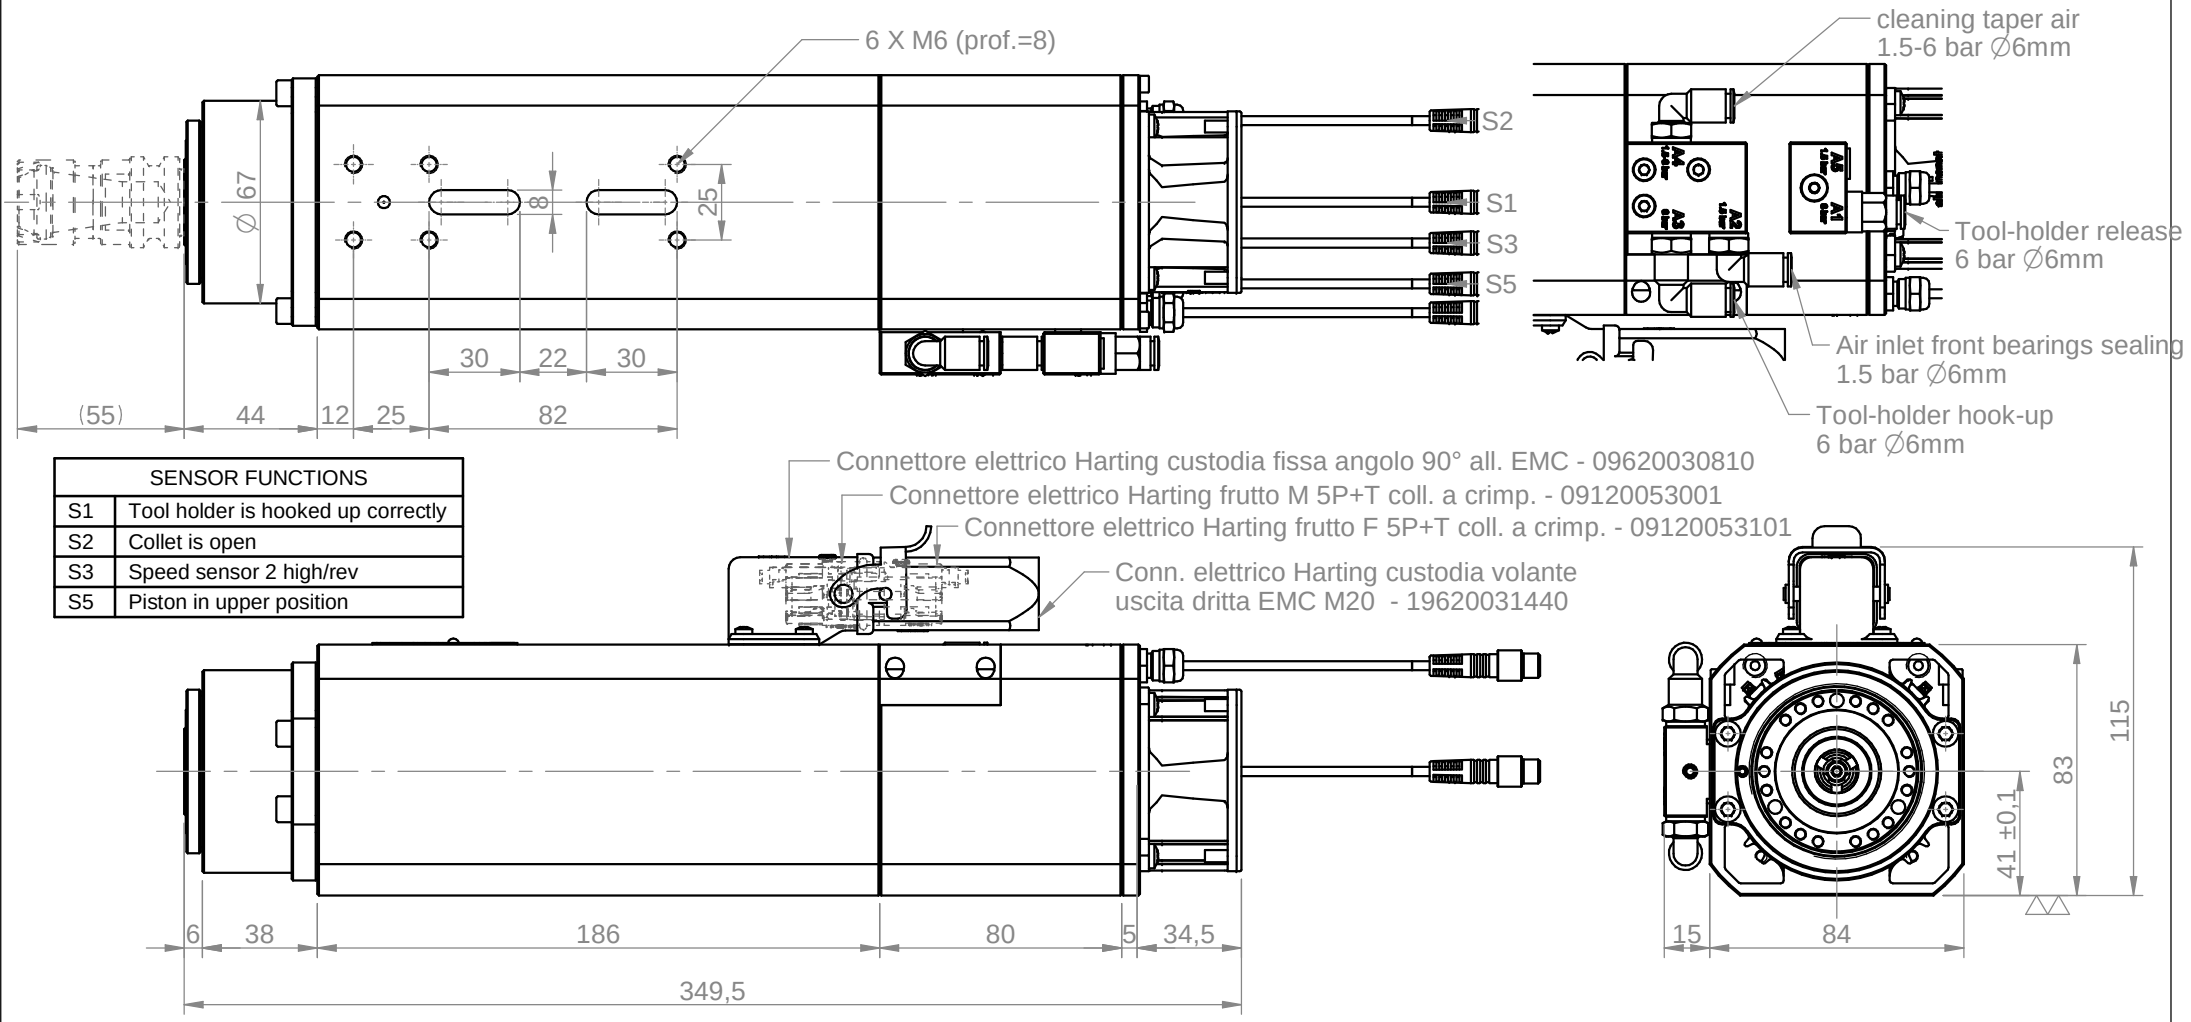


SENSOR FUNCTIONS	
S1	Tool holder is hooked up correctly
S2	Collet is open
S3	Speed sensor 2 high/rev
S5	Piston in upper position

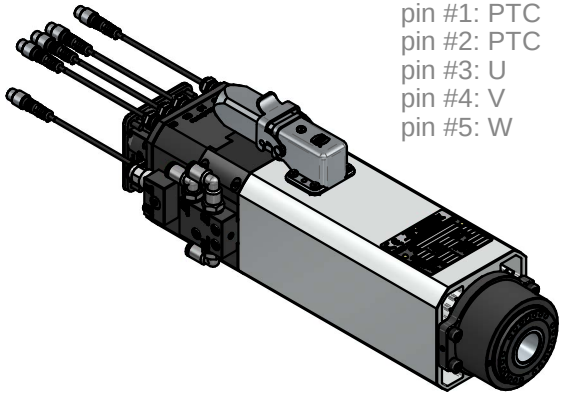

PLUG CONNECTION
pin #1: PTC
pin #2: PTC
pin #3: U
pin #4: V
pin #5: W

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Base voltage Y [V]	Protection	Ins. Cl.
2.2	S6 60%	24000	400	220		IP54	F

Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Absorb. Δ [A]	Absorb. Y [A]	Part number on nameplate
6000	30000	500	8.4		COMTC410006

Balancing according to ISO 1940 - G2.5 @ 30000 rpm	Balancing type	tool type	full key	tool type	half key	Peso / weight
						6.48 kg

Tolleranze non quotate: UNI EN 22768 fH
Smussi non quotati: 0.5mm

▽▽ = 0.8 | ▽▽ = 3.2 | ▽ = 12.5 | ~ = ▽

rev. n°	description	date	signature
00	Emissione	14/02/2020	D. Bottarel

drawn - date	approved - date	checked - date	sostituisce il	foglio / sheet	scala	
D. Bottarel - 14/02/2020	S. Perli - 14/02/2020	S. Perli - 14/02/2020	sostituito dal	1 / 1	n.d.	A4

TEKNOMOTOR

Teknomotor S.r.l.
Via Argenega 31, I-32038 Quero Vas (BL)
www.teknomotor.com

Title: ATC41-C-2DB-ISO20-SN-HY

Customer: Catalogo

Drawing code: COMTC410006

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.