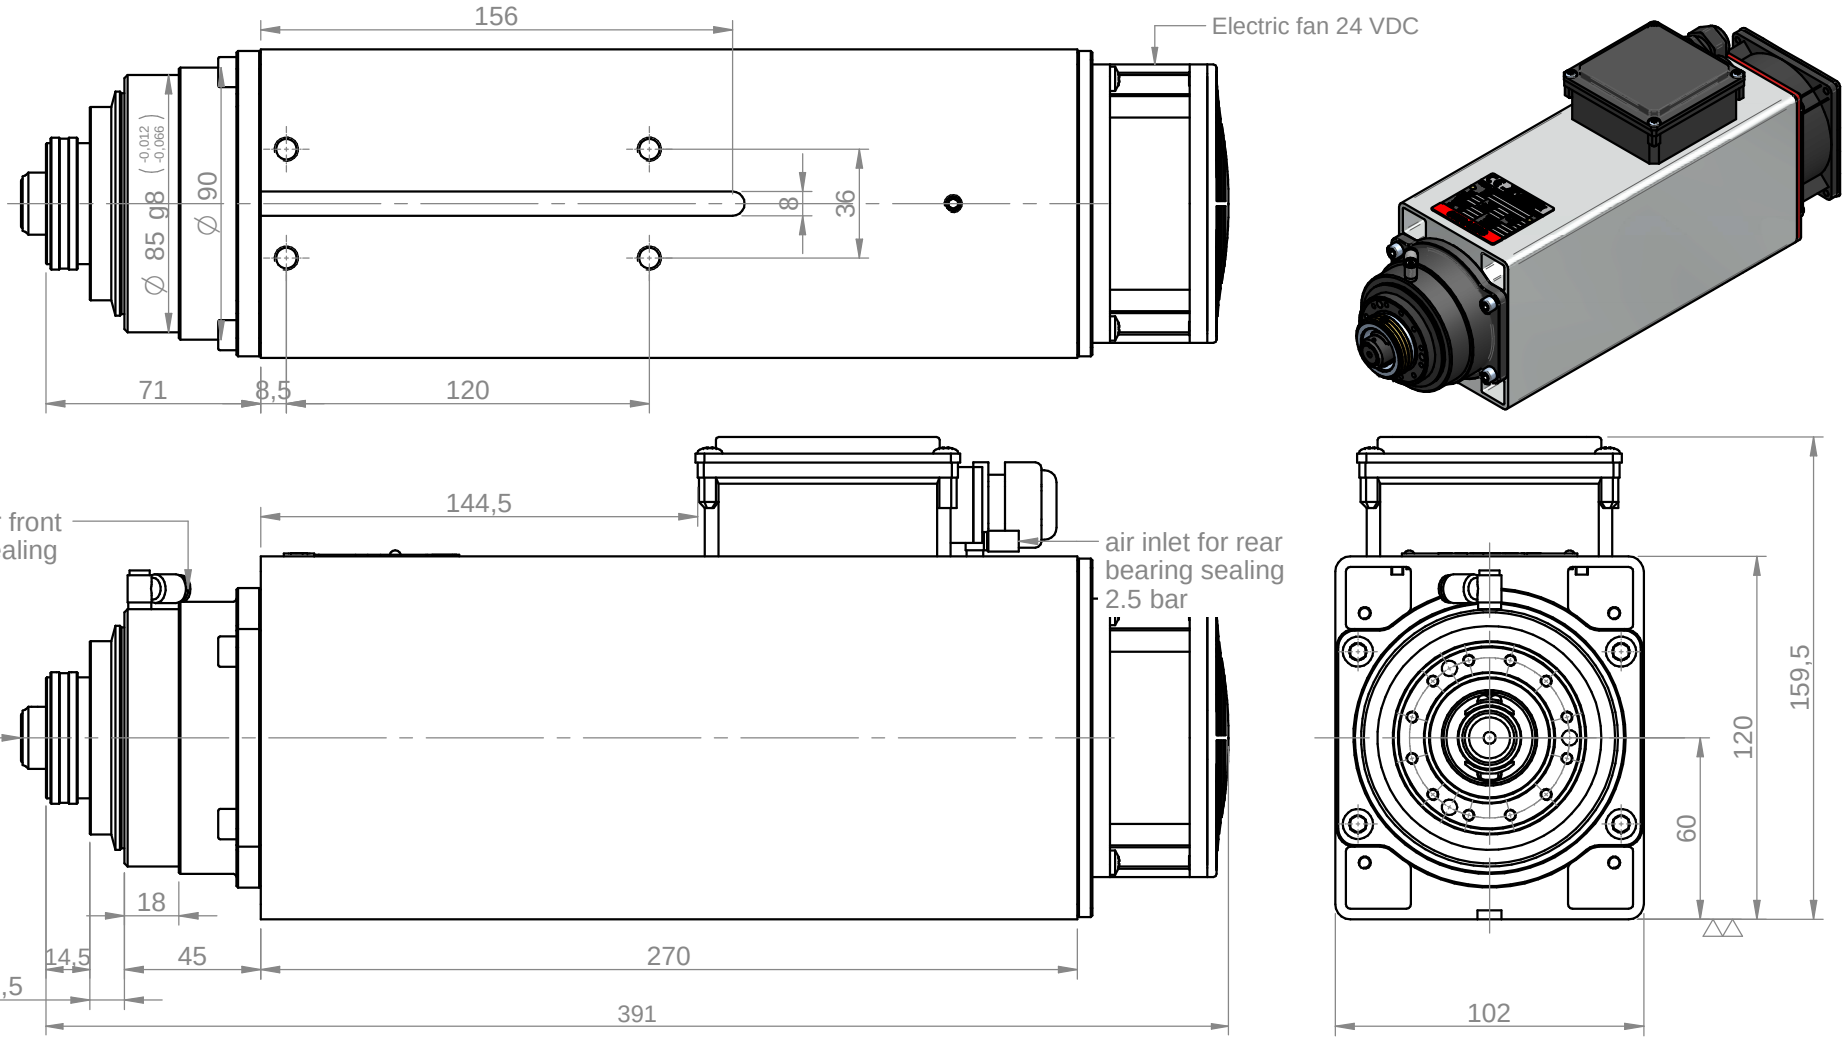


MOTOR WITH PTC THERMAL PROTECTION

USE DRIED AIR:
ACCORDIND TO DIRECTIVE ISO 8573-1
CLEANLINESS CLASS 2/4/3
SOLID PARTICLES: 1 mincron/1PPM
HUMIDITY: DEW POINT 3°C
OIL: 1mg/m^3
USE 5 micron FILTER +
0,1 micron min OIL SEPARATOR.

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Base voltage Y [V]	Protection	Ins. Cl.
2.2	S1	6000	100	220	380	IP54	F

Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Absorb. Δ [A]	Absorb. Y [A]	Part number on nameplate
1500	18000	300			COM51600417

Balancing according to ISO 1940 - G2.5 @ 18000 rpm	Balancing type	tool type	full key	tool type	half key	Peso / weight
						15.05 kg

Tolleranze non quotate: UNI EN 22768 fH
Smussi non quotati: 0.5mm

▽▽▽ = 0.8 ▽▽ = 3.2 ▽ = 12.5 ~ = ▽

rev. n°	description	date	signature
00	Emissione	14/10/2020	D. Bottarel

drawn - date	approved - date	checked - date	sostituisce il	foglio / sheet	scala
M. Giacometti - 14/10/2020	S. Perli - 14/10/2020	S. Perli - 14/10/2020	sostituito dal	1 / 1	n.d.

TEKNOMOTOR

Teknomotor S.r.l.
Via Argenega 31, I-32038 Quero Vas (BL)
www.teknomotor.com

Title: 5160-D-2DBS-HSKC40-HY-PR

Customer: 23663

Drawing code: COM51600479

A4

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.