


|   |      |              |
|---|------|--------------|
| Drill diameter                            | d0   | 12 mm        |
| Min. drill hole depth for through fixings | h2   | 190 mm       |
| Anchor length                             | l    | 200 mm       |
| Max. usable length hef,max./hef,min.      | tfix | 100 / 120 mm |
| Thread Ø x length                         |      | M12 x151 mm  |
| Spanner / wrench size                     | SW   | 19 mm        |

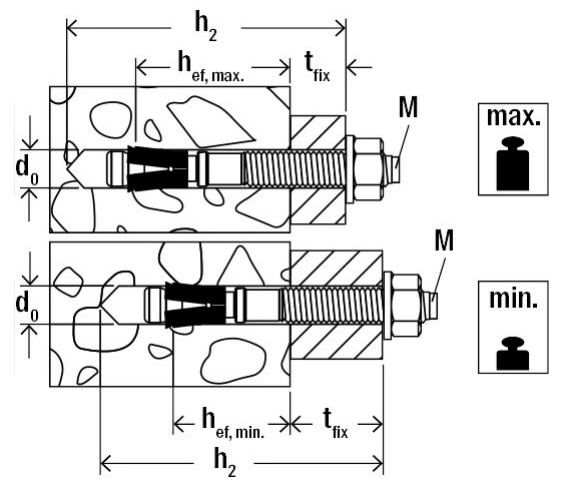

|                 |                             |
|-----------------|-----------------------------|
| Units:          | mm                          |
| Tolerances:     | +/-0.15mm                   |
| Material:       | Steel                       |
| Surface Finish: | Electrolytically galvanized |

|                         |            |  |                               |
|-------------------------|------------|--|-------------------------------|
| Itemref                 | Quantity   | Title/Name, designation, material, dimension etc             | Article No./Reference         |
| Drawn by<br>Kevin Damen | Checked by | Approved by - date   | File name<br>Date<br>7-3-2022 |
| <b>5876</b>             |            | <b>www.damencnc.com</b>                                      |                               |
|                         |            | 5876 12x200mm Concrete Anchor<br>Fischer FAZ II 12-100 95470 | Edition<br>Sheet<br>1 OF 1    |