
SIEMENS

Data sheet 3RM1910-1BA

Accessory for SIRIUS 3RM1 3-phase busbar for 3 motor starters Modular spacing 22.5 mm Screw connection system

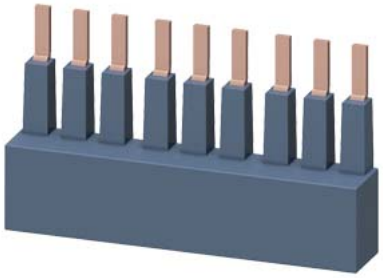

General technical data		
product brand name		SIRIUS
product designation		3-phase busbar
design of the product		For 3 motor starters
suitability for use		Motor starter 3RM1
product function short circuit protection		No
installation altitude at height above sea level maximum	m	2 000
ambient temperature		
● during operation	°C	-25 ... +60
● during transport	°C	-40 ... +70
● during storage	°C	-40 ... +70
insulation voltage rated value	V	500
reference code according to IEC 81346-2		X
Main circuit		
relative symmetrical tolerance of the operating voltage	%	**10**
ampacity maximum	A	**25**
operational current at AC at 480 V according to UL 508	A	**16**
Installation/ mounting/ dimensions		
mounting position		any
fastening method		screw fixing
width	mm	69
height	mm	41
depth	mm	12

Certificates/ approvals


General Product Approval				EMC	Declaration of Conformity
CSA	Confirmation	UL	EAC	RCM	EG-Konf.

Test Certificates	other	Railway
Type Test Certificates/Test Report	Confirmation	Special Test Certificate

Subject to change without notice
© Copyright Siemens

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1910-1BA
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1910-1BA
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RM1910-1BA
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1910-1BA&lang=en

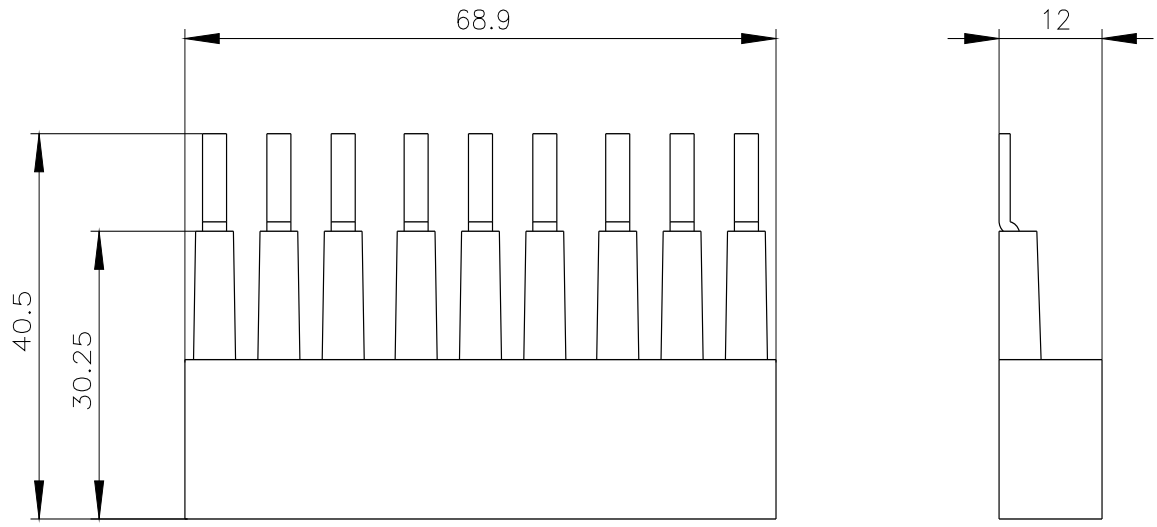

last modified: 12/16/2020

Subject to change without notice
© Copyright Siemens