
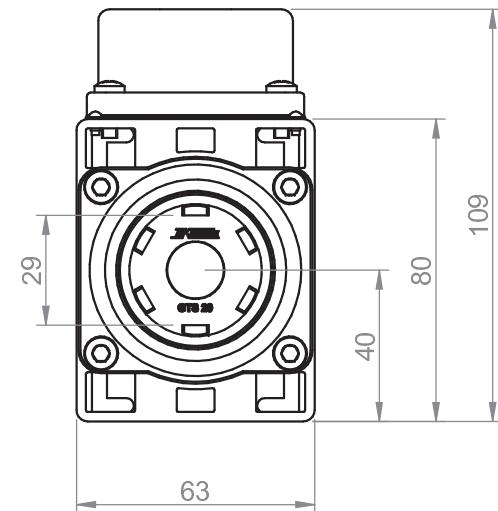
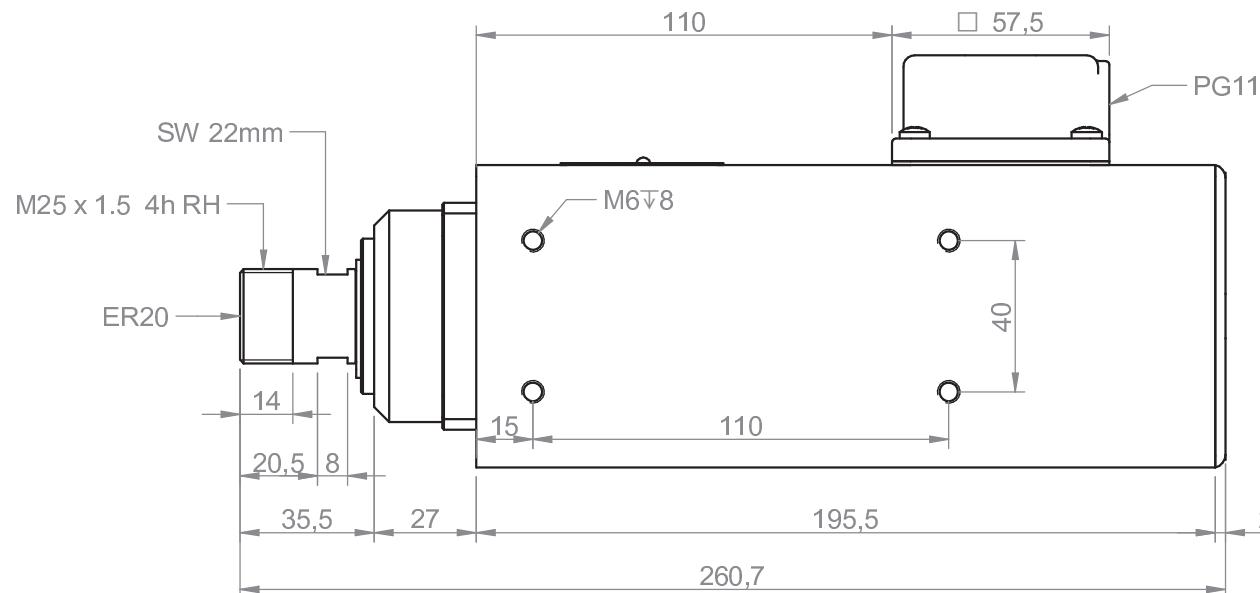
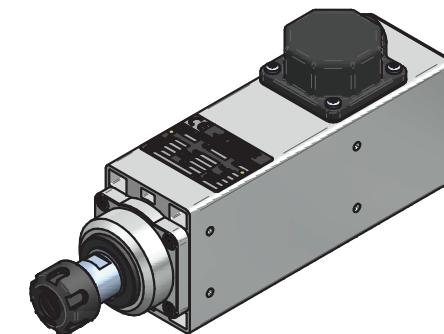


Ghiera serraggio
GTS20 RH

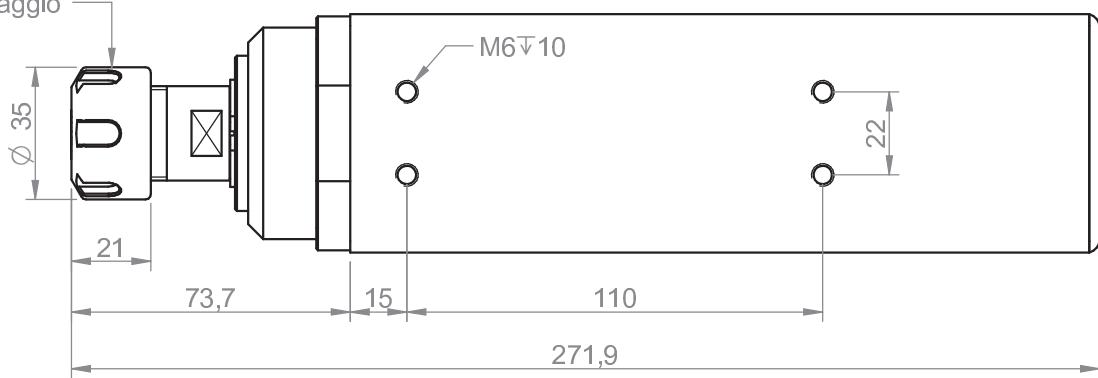

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Base voltage Y [V]	Protection	Ins. Cl.
0.73	S1	18000	300	220	380	IP54	F
Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Absorb. Δ [A]	Absorb. Y [A]	Part number on nameplate		
6000	18000	300	3.6	2.1	COM31400251		
Balancing according to ISO 1940 - G2.5 @ 18000 rpm	Balancing type	pool type	full key	pool type	half key	Peso / weight	3.48 kg
Tolleranze non quotate / unlisted tolerances: ±0.5mm							
Smussi non quotate / unlisted chamfers: ±0.5mm							
rev. n°	description						
00	Emissione						
drawn - date	approved - date	checked - date	sostituisce il				
D. Bottarel - 15/02/2010	S. Perli - 15/02/2010	S. Perli - 15/02/2010	sostituito dal				
foglio / sheet	scala						
1 / 1	1:2						

TEKnomotor

Teknomotor S.r.l.
Via Argenega 31, I-32038 Quero Vas (BL)
www.teknomotor.com

Title
3140-C-SB-P-ER20-RH

Customer
Catalogo

Drawing code
COM31400251

Drawing n°
3086