



RevNo	Revision note		Date	Signature	Checked

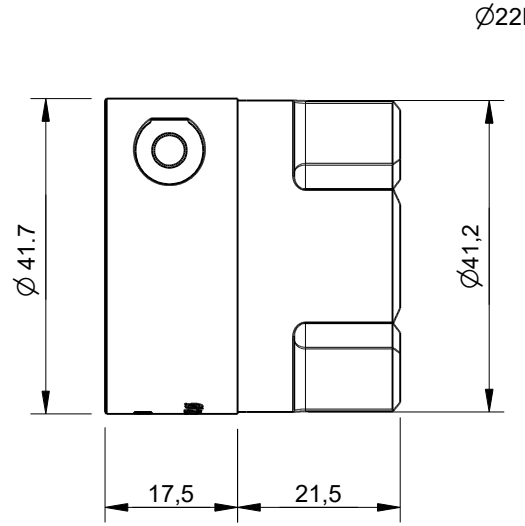


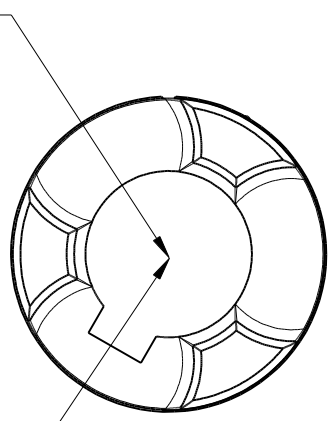


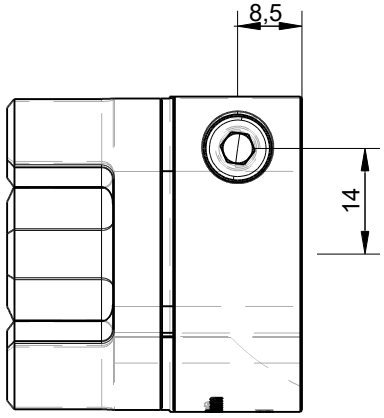


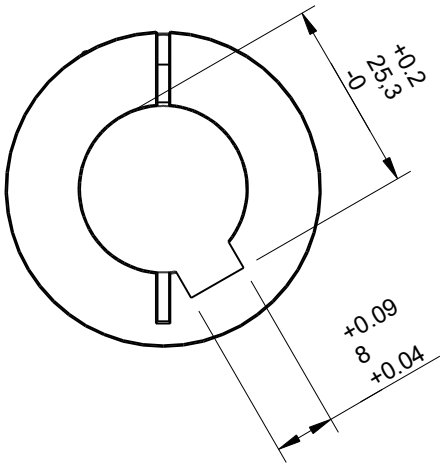

WARNING: The bore in the HUB is larger than in the spider (1787)
This means the shaft, can not protrude through the spider.

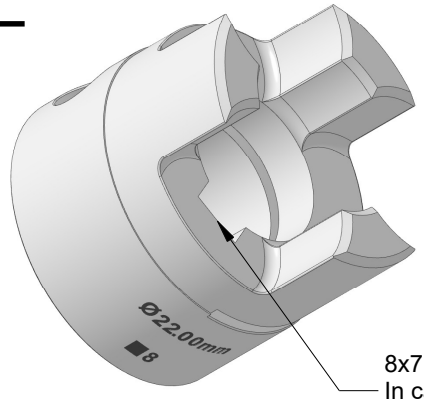

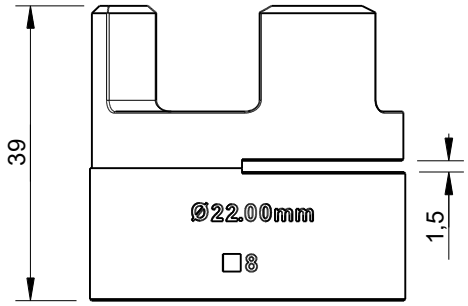

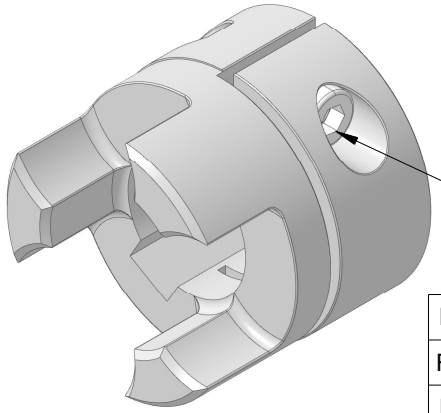

8x7mm Keyway is used as a failsafe,
In case the shaft coupler is overloaded this prevents slip
The keyway is made to have a freefit on the shaft for easy mounting

Hexbit size:	4 mm
Recommended Torque	5 Nm
MaximumTorque	8 Nm

Units	mm
Tolerances	± 0.1mm unless otherwise specified
Material	Alu 6082
Tumbling	Yes
Surface finish	None

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Drawn by Kevin Damen		Checked by	Approved by - date	File name	Date 19-2-2026	Scale 1:1

7522

www.damencnc.com

7522 HUB ShaftCoupler DCNC-D40-L65-B22.00mm with 8mm Keyway	Edition	Sheet
		1 OF 1